



Ø=26mm



Product code

T8-060-AC-1-10-WW-T (warm white transparent cover)
 T8-060-AC-1-10-NW-T (natural white transparent cover)
 T8-060-AC-1-10-CW-T (cool white transparent cover)
 T8-060-AC-1-10-WW-O (warm white opal cover)
 T8-060-AC-1-10-NW-O (natural white opal cover)
 T8-060-AC-1-10-CW-O (cool white opal cover)
 T8-060-AC-1-10-PK-T (MEAT color transparent cover)
 T8-060-AC-1-10-PK-O (MEAT color opal cover)

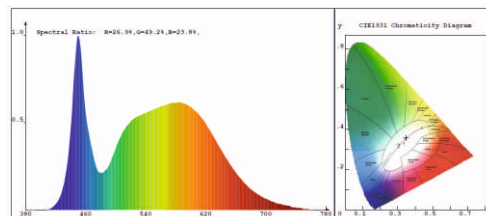

Power supply	100 - 240 Vac 50/60Hz			
Power [W]	8,8	9,2	9,5	10,4
Color temperature°K	3000	4000	5500	MEAT
CRI	> 80			
Bright flow [lm]	1010	1080	1160	725
Light efficiency	115-122 lm/w			70 lm/w
Light beam	120°			
P.F.	> 0,95			
Work temperature	- 25°degrees / + 40°degrees			
Led duration***	40.000 h			
Protection grade	IP 20			
Connector	G13 			
Compliance with reg.	EN 62476 EN 62493 EN 62471 EN 61547 EN 61000-3-2 EN 61000-3-3			

- Refrigerated desks and shop windows lighting for supermarkets, ice cream and pastry shops
- Direct replacement of fluorescent tubes, energy savings guaranteed > 50%
- Retrofit lighting system



*** Parameters are indicated by Led Creator and suitable for installations according to specific techniques in the product technical documents

