



Ø=26mm



Product code

T8-097-AC-1-14-WW-T (warm white transparent cover)
 T8-097-AC-1-14-NW-T (natural white transparent cover)
 T8-097-AC-1-14-CW-T (cool white transparent cover)
 T8-097-AC-1-14-WW-O (warm white opal cover)
 T8-097-AC-1-14-NW-O (natural white opal cover)
 T8-097-AC-1-14-CW-O (cool white opal cover)
 T8-097-AC-1-14-PK-T (MEAT color transparent cover)
 T8-097-AC-1-14-PK-O (MEAT color opal cover)

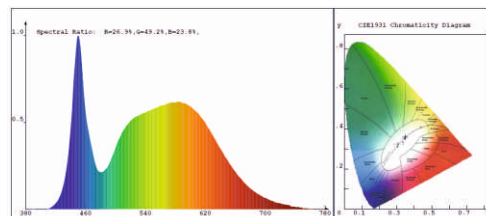

Power supply	100 - 240 Vac 50/60Hz			
Power [W]	15,5	13,5	13,7	14,3
Color temperature°K	3000	4000	5500	MEAT
CRI	> 82			
Bright flow [lm]	1829	1550	1607	1060
Light efficiency	115-120 lm/w			74 lm/w
Light beam	120°			
P.F.	> 0,95			
Work temperature	- 25°degrees / + 40°degrees			
Led duration***	40.000 h			
Protection grade	IP 20			
Connector	G13 			
Compliance with reg.	EN 62476 EN 62493 EN 62471 EN 61547 EN 61000-3-2 EN 61000-3-3			

- Refrigerated desks and shop windows lighting for supermarkets, ice cream and pastry shops
- Direct replacement of fluorescent tubes, energy savings guaranteed > 50%
- Retrofit lighting system



*** Parameters are indicated by Led Creator and suitable for installations according to specific techniques in the product technical documents

